



# ATS1250

## 4 door access control DGP

### Data Gathering Panels

Data Gathering Panels (DGP) are used to expand the number of alarm inputs on the system and allow inputs and relays to be connected at a location remote from the Advisor MASTER panel. DGPs communicate via poll & reply messages and send alarms to the control panel for processing. The DGPs collect information from detectors, door contacts and other similar devices. There are DGPs available for conventional devices, wireless devices as well as for intelligent addressable devices. A special DGP is also available for collecting the information for either four doors or lifts.

### Product Overview

The ATS1250/1260 4-Door/Lift DGP is a versatile access control panel to extend the Advisor MASTER system with advanced access control functions. Real time alarm and access control on 4 doors, with power supply and housing. A total of 12 ATS1250 can be connected to an Advisor Master panel. To program both the controllers a user interface with liquid crystal display must be included in the system. The 4-door controller can operate off-line with no degradation in performances, should communication with the Advisor Master panel fail.

### Extensive programming features

Can be used to program a sequence of unique events for a desired outcome (macro logic). For example when a user badges a card or selects a floor, lights in the area can be programmed to turn on or a macro can activate a light on a map at a security desk to indicate a floor has been accessed.

### Connectivity

A total of 12 ATS 1250 or ATS 1260 can be connected to an Advisor Master panel. To program both the controllers a user interface with liquid crystal display must be included in the system.

### Communications


The controllers can be mounted up to 1.5 km from the Advisor Master panel, which will continuously check if the controller is still on line. The 4-door controller and the 4-lift controller can operate off-line with no degradation in performances, should communication with the Advisor Master panel fail.

### Users

The 4-door controller and the 4-lift controller are using the user information from the Advisor Master panel. The number of card users is 11466. 1000 users can be programmed with a PIN code and with a name.

### Access control procedures

Access control procedures like swiping a card or entering a PIN, can be programmed to function only within particular blocks of time or

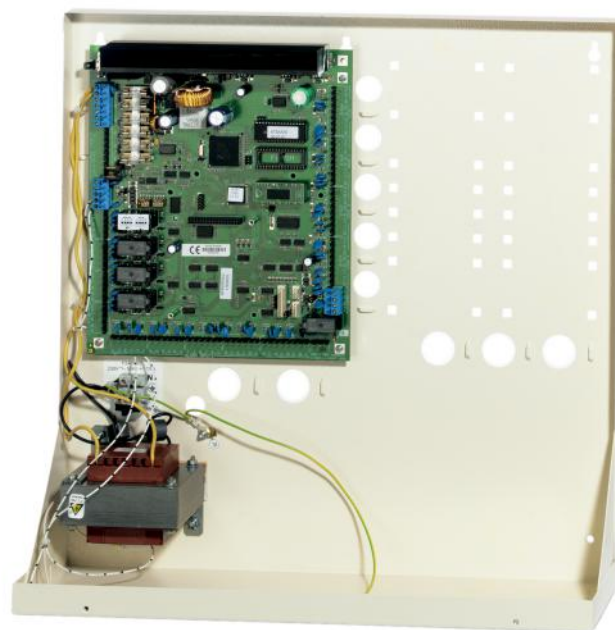

### Details

- Real time alarm & access control on 4 doors
- Full mirror database for offline condition
- Max 12 4-door controllers and 48 intelligent doors/panel
- Global anti-passback
- Region control
- User counter, interlocking, card + PIN
- 16 alarm inputs on board
- 4 reader inputs with built-in interface
- Local RS485 bus for up to 16 readers
- Wide range of third party readers supported
- 4 relays on board for lock strikes
- 52 programmable outputs

outside those times. For example, during a period deemed as a high security risk, granting access may require a PIN and card to be presented at reader. At another time of low security risk, access to the same area may be gained with only the presentation of a card.

## **Door groups**

---

The 4-door controller is also using the door groups from the Advisor Master panel. Standard there are 128 door groups available.

## **Timezones and holidays**

---

The controllers can use one or more of the 24 free programmable time zones and 24 holiday slots.

## **Inputs**

---

Both controllers have 16 four state monitored inputs on board. On the 4-door controller, by default 12 inputs are assigned to DOTL alarm, Egress and door contacts, but they can also be re-programmed as regular inputs.

## **Readers**

---

The ATS 1250 and ATS 1260 support many reader formats including magnetic swipe, PIN code, proximity and Wiegand.

# ATS1250

## 4 door access control DGP

### Technical specifications

#### General

Expander type	Door controller
Product line	Advisor Advanced, ATS Master
Connection type	Databus connection
Max. distance from panel	1.5 km
Specified cable	Aritech WCAT 52/54 or equivalent

#### Inputs

Total	16
Onboard	16

#### Outputs

Total	52
Onboard	4
Expandable	48 (6x ATS1811)
Type of outputs	Relay
Relays	4 on-board (expandable to 52 with relay cards)
Maximum number of outputs	52

#### System

Users	more than 1000
PIN codes	1000 dependent on panel memory options
Door groups	128
Timezones / holidays	24/24
Addressing	DIP Switches

#### Backup

Dynamic battery testing	Yes
-------------------------	-----

#### Electrical

Operating voltage	13.8 V
Power supply type	VDC
Power consumption	3 A
Integrated power supply	Yes

#### Physical

Physical dimensions	475 x 460 x 160 mm
---------------------	--------------------

#### Environmental

Operating temperature	0 to 50 °C
-----------------------	------------

#### Power supply

	13.8 VDC / 3 A
--	----------------

#### Battery test

	Dynamic battery testing
--	-------------------------

#### Max. distance from panel

	1.5 km
--	--------

#### Specified cable

	Aritech WCAT 52/54 or equivalent
--	----------------------------------

#### Data bus monitoring

	Continuous monitoring for off-line conditions of all devices on bus
--	---

#### Addressing

	Individually addressed via DIP switches
--	---

#### Users

	11466 cardholders (expandable to 65535 with IUM)
--	--

#### PIN codes

	1000 dependant on panel memory options
--	--

#### Door groups

	128
--	-----

#### Time zones / Holidays

	24 / 24
--	---------

#### Zones

	16 (free programmable inputs)
--	-------------------------------

#### Relays

	4 on-board (expandable to 52 with relay cards)
--	--

#### Operating temperature

	0 to +50°C
--	------------

#### Mains transformer

	230 V 50 Hz/23 VAC 120 VA
--	---------------------------

#### Housing dimensions (W x H x D)

	475 x 460 x 160 mm
--	--------------------

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.