


ATS1810

4 way relay board

Product Overview

A 4-way relay card provides four single pole relays with connection terminals to the common (C), normally open (NO), and normally closed (NC) contacts. The relay contacts are rated at 1 Amp @ 0 to 30 VDC; reducing to 300 mA @ 48 VDC. If fitted to a DGP, two relay modules can be connected together in daisy-chain fashion to provide up to eight relays on ATS1201. When fitted to the ATS control panel or 4-door/4-lift DGP, only one relay module is allowed providing four relays.

An LED is provided for every relay to indicate activation.

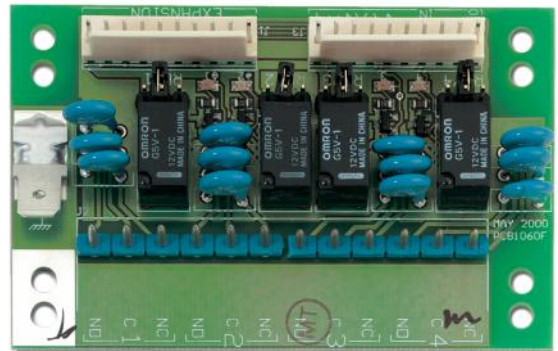

ATS1810

4 way relay board

Technical specifications

General

Expander type	Output expander
Product line	ATS Master, Advisor Advanced
Connection type	Plug-in

Electrical

Integrated power supply	No
-------------------------	----

Supply voltage

	10.5 - 13.8 VDC
--	-----------------

Operating current

	100 mA max.
--	-------------

Dimensions (W x H)

	80 mm x 52 mm
--	---------------

Operating temperature

	0° to +50°C
--	-------------

Humidity

	95% non condensing
--	--------------------

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

30 April 2019 - 9:50


fescom
engineering co. ltd.

 **United
Technologies**
Climate | Controls | Security