

2X-LB

Addressable Fire Panel Accessory - Loop Expansion Board - 2 loop

Overview

The loop board with plugable connectors adds 2 additional loops to your 2-loop low-end addressable fire panel that doubles the amount of devices to be supported by one panel and 128 extra zones can be programmed. Together with the 2 additional loops, 4 supervised sounder/fire-routing outputs, which can be used as freely programmable outputs, come along as well.

The Application


The loop board allows for bigger single panel applications. Instead of using two 2-loop panels you now have only one panel to power and all the loop wiring is concentrated to one location without having to use a Firenet network.

In case you need to expand an existing system you don't need to put another panel in place. You only have to add the loop board. This makes your system more flexible and easier to expand.

Please note that only the 2-loop panel has this capability of adding the additional loop board.

Mounting

The board can be plugged directly on the front of the main board of the panel on the easy to remove chassis. No additional cabling needs to be done.

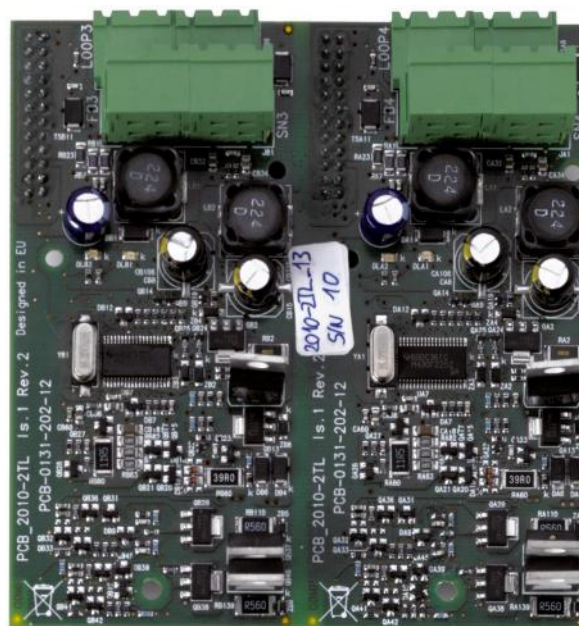

Details

- 2 loops and adds up to 128 zones
- 4 programmable outputs
- Plugable connectors
- Plugs directly on the front of the main board and chassis

2X-LB

Addressable Fire Panel Accessory - Loop Expansion Board - 2 loop

Technical specifications

Loop

Quantity	2
----------	---

Physical

Physical dimensions	127 x 55 x 152 mm (W x H x D)
Net weight	120 g
Shipping weight	192 g
Mounting type	Surface Mount

Environmental

Operating temperature	-8 to +42°C
Storage temperature	-10 to +50°C
Relative humidity	95% max. noncondensing

Standards & regulation

Certification	EN54-2, EN54-4, EN54-13, EN54-21
Standards	EN54-2, EN54-4, EN54-13, EN54-21
Environmental	CPD, WEEE, RoHS

Outputs

Programmable supervised	4, 700mA / 19.5-28VDC (24VDC nominal)
Cable type	Recommended 2 core 1.5 mm ² twisted pair
End of Line resistor	15kohm

Loops

Outputs	2, 250 mA / 29VDC (29VDC to 36VDC)
Cable length	56ohm / 1µF max. 2 km
Cable type	Recommended 2 core 1.5 mm ² twisted pair

Environmental conditions

Storage temperature	-10°C to +50 °C
Operating temperature	-8°C to +42 °C
Relative humidity	max. 95 % (non-condensing)

Mechanical

Weight	0.12 kg
--------	---------

As a company of innovation, UTC Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit UTC Fire & Security online or contact your sales representative.

25 February 2019 - 22:56


fescom
engineering co. ltd.

 **United Technologies**
Climate | Controls | Security