

Vigilon A3 Mimic

The A3 Mimic provides a pictorial representation of a building's layout. This gives a rapid, visual indication of the location of any fire incident.


It can also be used to provide indication of fault and supervisory events in the system.

This one panel can be used as a Zonal Mimic or can hold a pictorial overlay to provide a customised view.

The A3 Customised Mimic panel can be mounted in either landscape or portrait, while an A3 Zonal Mimic panel must only be mounted landscape when using the overlay supplied.

Product range

- The panel illumination defaults to a Zonal Mimic but can be programmed during commissioning to be a Customised Mimic
- The panel has its own mains derived power supply with battery (Repeat Panels and Mimics require external power supply)
- The panel is supplied with pre-printed and blank high quality UV protected A3 sheets

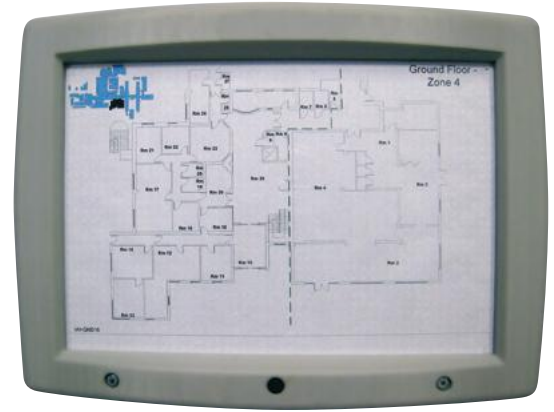


Description

The A3 Mimic panel provides a pictorial representation of a building's layout. This gives a rapid, visual indication of the location of any fire incident.



KEY FEATURES

- Displays up to 128 zones in zonal format
- Site programmable format allows 1536 LED's to be individually programmed
- Site programme held in flash memory so site changes can be programmed on site without changing LEDs or electronics
- The A3 Customised Mimic panel can be mounted in either landscape or portrait, while an A3 Zonal Mimic panel must only be mounted landscape when using the overlay supplied

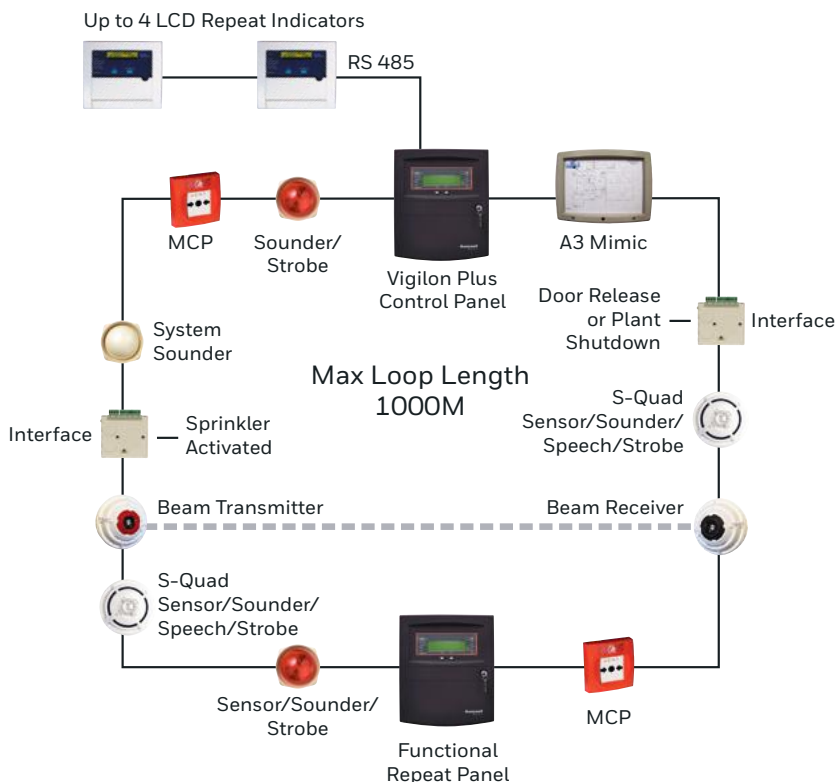

Vigilon A3 Mimic Technical Specifications

Dimensions (mm)

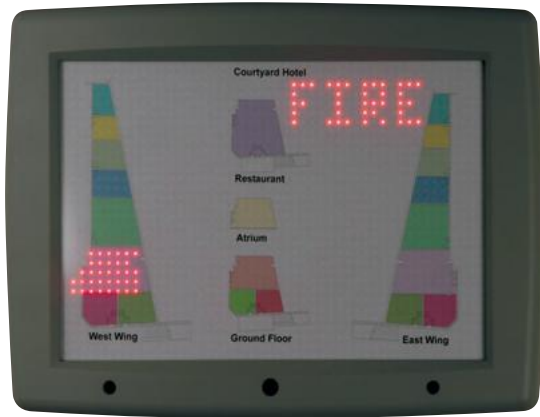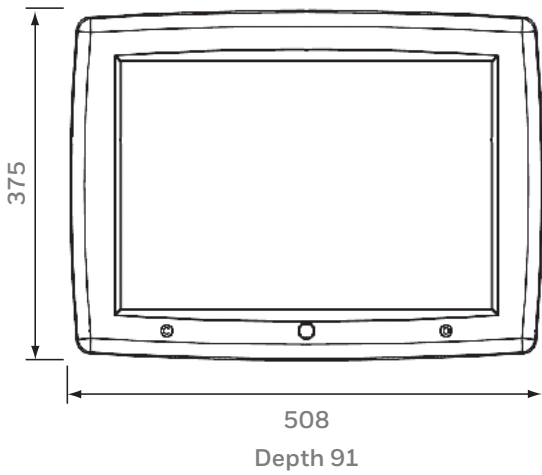

STANDARD PERFORMANCE VISUAL ALARMS	
TYPE	A3 Mimic
MAX QUANTITY PER LOOP	4
BATTERIES	2 x 6V @ 7Ah
BATTERY STANDBY	24 hours + 30 minutes alarm upgradeable to 72 hours
APPROX WEIGHT	7.9 Kg without batteries 10.5 Kg with batteries
OPERATING TEMPERATURE	0°C to +45°C
CABLE ENTRY	Rear
LOAD FACTOR	3
RELEVANT STANDARD	EN54 Parts 2 & 4
INDICATORS	1536 Number – High Intensity Red LEDs
APPROVALS	Applied for

ORDER CODES	
MIMICS AND REPEAT PANELS (EN54)	
VIGILON REPEAT PANEL 72 HOUR (NEW) BS & EN COMPATIBLE	VIG-RPT-72
NON-FUNCTIONAL LCD REPEAT DISPLAY (RS485 CONNECTION TO PANEL)	COMPACT-RPT
A3 ZONAL AND GRAPHIC MIMIC	VIG-MIM-A3
REPEAT PANEL AND MIMIC ACCESSORIES	
VIGILON REPEAT PANEL BATTERY PACK	VSRPT-BATT
BATTERY PACK FOR A3 MIMIC (2 X 6V 7 AH)	VSRPT-BATT-A3
REPEAT PANEL FLUSH SURROUND	VIG-RPT-FLUSH
STAINLESS STEEL DOOR FOR VIGILON REPEAT	VIG-RPT-DOOR-SS
STAINLESS STEEL REPEAT PANEL FLUSH MOUNTING KIT	VIG-RPT-FLUSH-SS
LED DRIVER BOARD FOR SPECIAL MIMICS	S4-34600

For more information

www.gent.co.uk

Honeywell Gent

140 Waterside Road
Hamilton Industrial Park,
Leicester, LE5 1TN
Telephone: 0203 409 1779
E-mail: gentenquiry@honeywell.com

Content subject to change
without notice.

GEN148 | 11/2018
© 2018 Honeywell International Inc.

fescom
engineering co. ltd.

Honeywell
GENT